



Philadelphia Hardware Group, Inc.

6590 Top Gun Street
 San Diego, CA 92121
www.philihardware.com
 Tel
 858.642.0450
 858.545.2309
 Fax
 858.642.0454

500T Series

**GRADE 3
 ESCORT**

SPECIFICATIONS



**500T-ET-US3
 Entrance**

| | |
|--------------|--|
| Door Prep | Cross bore: 2-1/8" Edge bore: Edge Bore: 1" Latch Face: 1" x 2-1/4" |
| Backset | Fits both 2-3/8" and 2-3/4". |
| Door Fitting | 1-3/8" ~ 1-3/4" door thick. Special order for 2" door thick. |
| Exposed Trim | Zinc or Stainless steel. Lever is zinc alloy. |
| Keys | Key as requested (KA, KD, MCK, MK, GMK). |
| Cylinder | KW1 standard, SC1 optional. |
| Latch | 2-3/8" and 2-3/4" adjustable Bolt: 1/2" throw. Faceplate: 1" x 2-1/4" round corner. |
| Strike | Full lip 1-3/4" x 2-1/4" round corner (9103). |
| Door Handing | Reversible, suitable for both right and left hand door. |
| Design | Lever Return within 1/2" of door face confirms to California Referenced Standards Code |
| Function | 500T – Entrance 501T – Passage 502T – Privacy 515T – Single Dummy  500TP – Entrance with Panic-proof Push Button 502TP – Privacy with Panic-proof Push Button Stock for US10B, US15 only, special order for other finishes. |
| Finish | Stock Finish: US3 Polish Brass US5 Antique Brass US10B Oil-Rubbed Bronze US15 Satin Nickel US26 Polish Chrome Other required finish is subject to minimum order quantity and longer delivery lead-time. |

SAN DIEGO

•

CHICAGO

•

ATLANTA




Philadelphia Hardware Group, Inc.

6590 Top Gun Street
San Diego, CA 92121
www.philihardware.com

Tel
858.642.0450
858.545.2309
Fax
858.642.0454

DIMENSIONS

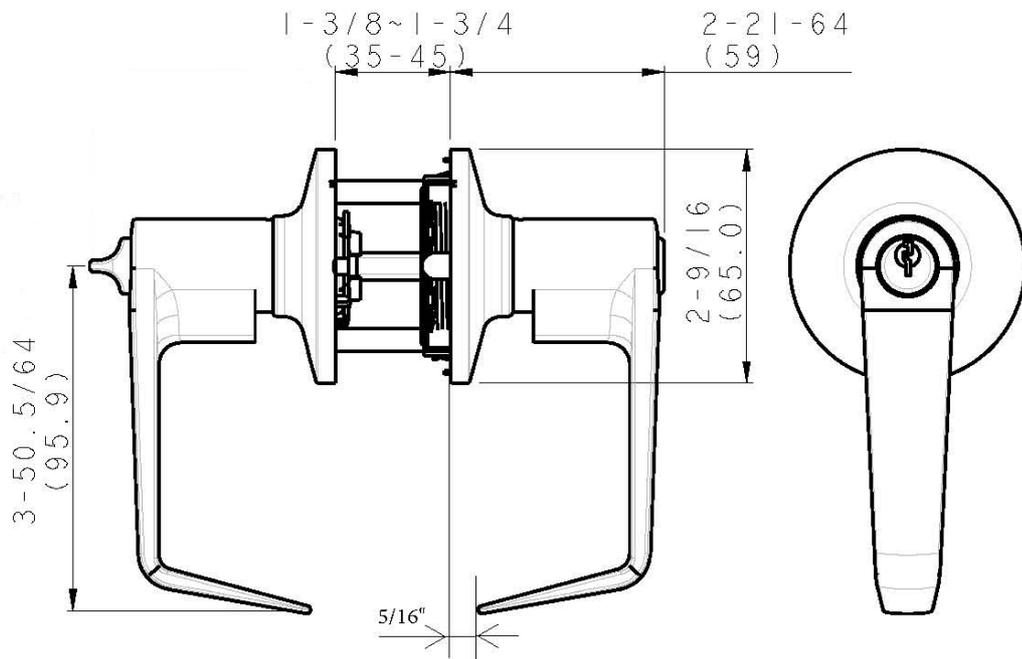

SAN DIEGO

•

CHICAGO

•

ATLANTA